



M410

VARIABLE HEIGHT BED

FEATURES

- ~ Modern European Design
- ~ Durable Zinc-Copper Alloy Cranks. Allows More than 10,000 Plus Cycles of Use. Quite and Smooth Operation
- ~ Mechanical Winding Drive System with Gas assisted Hi-Low
- ~ Removable HDPE Head & Foot End board, available for CPR
- ~ Modern ABS Deck Panels, Removable and Never-rust (Easy Cleaning & Service)
- ~ Clamp On 3/4 Length Fold Down Tubular Side Rails, Durable and Reliable
- ~ Rotating Bumpers at 4 Conner, Soft Contoured Mattress Retainers at Head & Foot
- ~ Tente 5" Central Locking Castors





DIMENSIONS & ADJUSTMENT RANGE

Overall Length	218.0cm
Overall Width	101.0cm
Overall Length Foot Panel Extension Down	247.0cm
Mattress Surface Length - Between Panels	203.0cm
Deck Height Range 125mm Castors	40.5cm to 75.5cm
Backrest Angle Adjustment (Mechanical)	0 to 65°
Knee Break Angle Adjustment (Mechanical)	0 to 35°

RECOMMENDED MATTRESS SIZE DIMENSIONS

Thickness Max = 17cm & Min = 8cm	W86cm x L198cm
----------------------------------	----------------

PRODUCT WEIGHT (APPROXIMATE)

With Side Rails Fitted	135Kg
Safe Working Load (Safety Factor = 2xSWL)	250Kg



TENTE 5'
Central Locking Castors



DIRECTIONAL LOCK
One direction locking castor. In this position the castor provides better straight line control when the bed is being moved




NEUTRAL LOCK
All functions are released and the bed can be moved freely in any direction



FULLY BRAKED
In this position the bed fully stationary. The profile bed uses four locking castors for complete safety and reliability

M410

VARIABLE HEIGHT BED

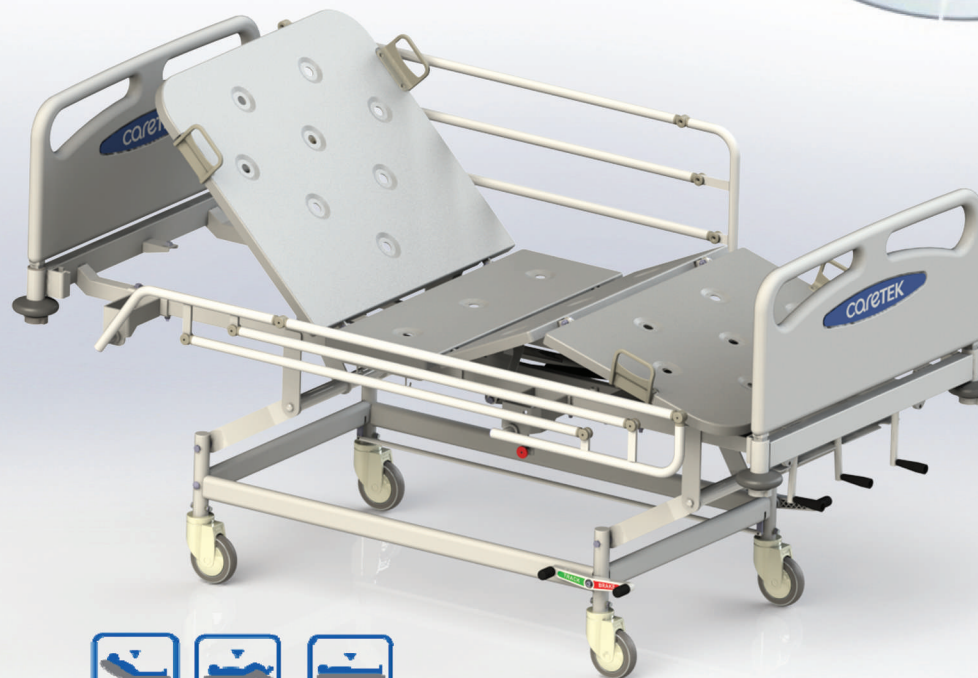

0 - 65°



0 - 35°



40 - 75cm